



DESCRIZIONE DEL PRODOTTO


» Per filettatura metrica ISO

MATERIALE

» HSS-E (5% Co), rivestimento TiN



SW	d3	d5	l	l1	P	d	N°	EUR
-	2,2	2,5	56	6	0,5	M 3	WZG 34121/ 3	< >
2,1	2,8	3,3	63	7,5	0,7	M 4	WZG 34121/ 4	< >
2,7	3,5	4,2	70	8,5	0,8	M 5	WZG 34121/ 5	< >
3,4	4,5	5	80	11	1	M 6	WZG 34121/ 6	< >
4,9	6	6,8	90	14	1,25	M 8	WZG 34121/ 8	< >
5,5	7	8,5	100	16	1,5	M10	WZG 34121/10	< >
7	9	10,2	110	18,5	1,75	M12	WZG 34121/12	< >
9	11	12	110	20	2	M14	WZG 34121/14	< >
9	12	14	110	20	2	M16	WZG 34121/16	< >
11	14	15,5	125	25	2,5	M18	WZG 34121/18	< >
12	16	17,5	140	25	2,5	M20	WZG 34121/20	< >
14,5	18	21	160	30	3	M24	WZG 34121/24	< >

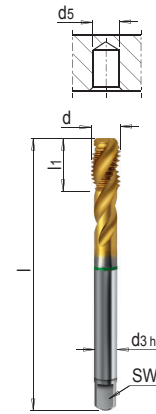

VALORI DI RIFERIMENTO PER I MASCHI A MACCHINA

WZG 341112 WZG 34121 WZG 341215 WZG 34221 WZG 34521	WZG 34123 WZG 341235 WZG 34223 WZG 34523	Materiale	Resistenza	Vc ¹ m/min.
		1.1730	640 N/mm ²	10
		1.2083	780 N/mm ²	8
		1.2085	1080 N/mm ²	6
		1.2162	660 N/mm ²	10
		1.2311	1080 N/mm ²	6
		1.2312	1080 N/mm ²	6
		1.2316	1010 N/mm ²	6
		1.2343	780 N/mm ²	10
		1.2379	780 N/mm ²	6
		1.2767	830 N/mm ²	8
		1.2842	775 N/mm ²	10

1) Vc: Velocità di taglio (m/min.)

Nel calcolatore dei parametri di taglio potete trovare altri materiali e valori di taglio